

Safety Instructions



0, 1, 6, 8, 11, 12, 15,
22, 23, 25, 28



Info Hotline

+49 (0) 5041 998 389

Mon. - Do. 7⁰⁰ - 20⁰⁰

Fr. 7⁰⁰ - 17⁰⁰

Paulmann Licht GmbH

Quezinger Feld 2

31832 Springe / Germany






www.paulmann.com

Art.-Nr.:

704.80

704.81

(+MA 173)
PMK 09/14

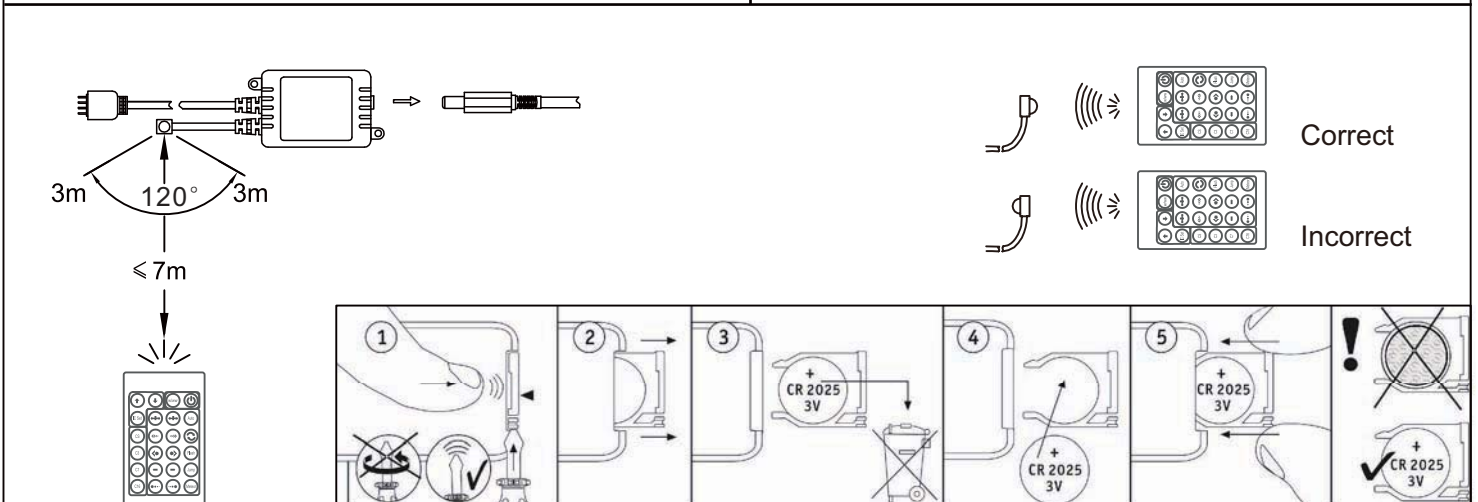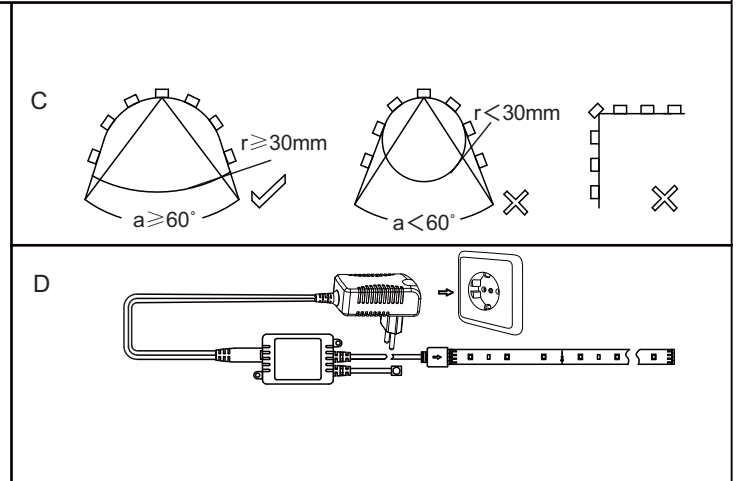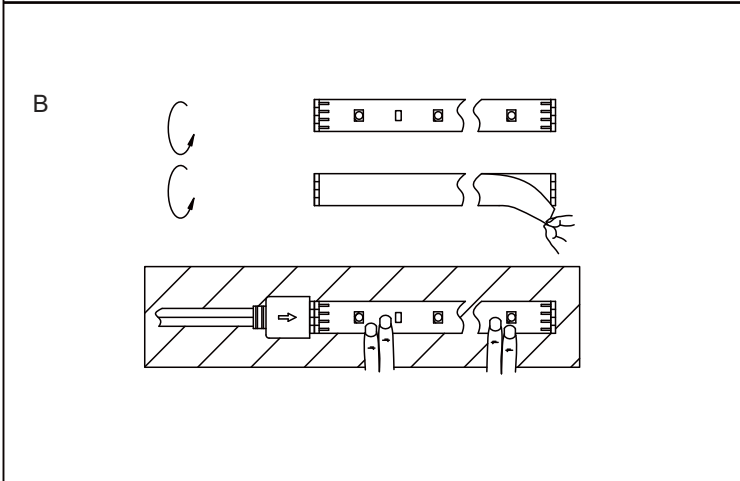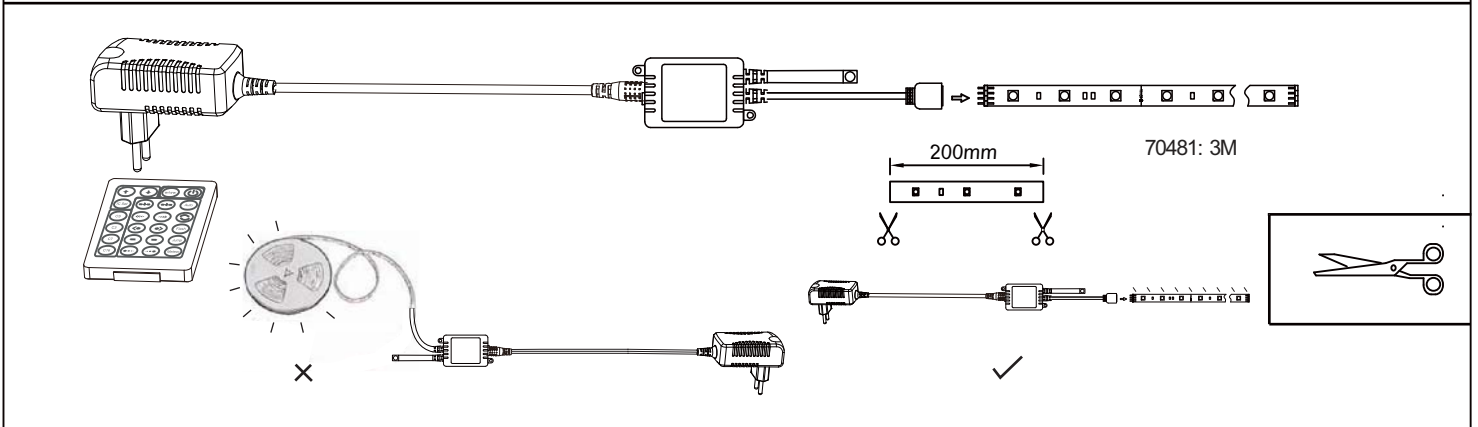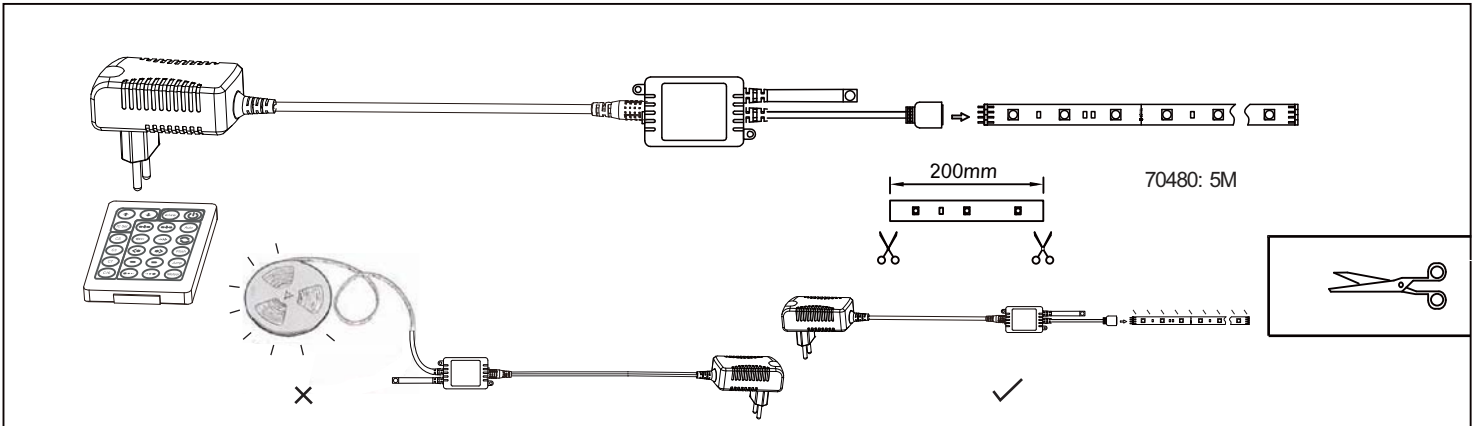



	Light increases when in static mode, speed increases when in dynamic mode and IC number increases when in IC setting mode
	ON/OFF key
	flow to two terminals from centre (CS, C3, C7, C16)
	Auto-cycle mode
	Trail into left & CS, C3, C7, C16
	Trail from two directions in turn
	Horse race to left direction (CS, C3, C7, C16)
	Flash function key (CS, C3, C7, C16)
	spread to left (CS, C3, C7, C16)
	Jump efficient key (CS, C3, C7, C16)
	Queued color running to left with a tag (CS, C3, C7, C16)
	Queued color running to right with a tag (CS, C3, C7, C16)

On / 0 ff







White







Dimm







Length setting








Speed







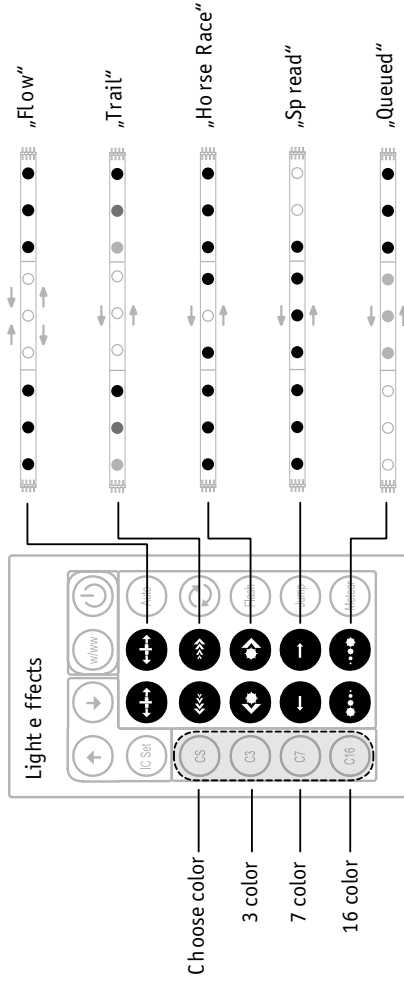

Mix of all effects







Fade







Color jump







Mix of





