


Merlin BT

Manufacturing process	Needlefelt		ISO 2424
Surface aspect	Flat		ISO 2424
Backing	BT		ISO 2424
Pile yarn composition	100% PP		
Pile weight	500 g/m ²		
Total weight	3500 g/m ²	+/- 10%	ISO 8543
Total height	5,5 mm	+/- 10%	ISO 1765
Overall use class	Commercial 33, Areas with heavy use		EN 1307
Luxury class	LC1		EN 1307
Castor chair suitability	Yes, permanent use		EN 985
Stair suitability	No		EN 1307
Colour fastness to light	≥ 5		ISO 105-B02
Colour fastness to rubbing, wet and dry	≥ 4		ISO 105-X12
Colour fastness to water	≥ 4		ISO 105-E01
Colour fastness to soiling	≥ 3		EN 1269
Electrostatic charging	< 2kV		ISO 6356
Acoustical walking noise absorption dlw	20 dB		ISO 140-8
Thermal resistance	0.064 m ² .K/W		ISO 8302
Slip resistance	> 0,3	Machine direction	EN 13893
	> 0,3	Crossdirection	EN 13893
Flammability	Bfl,s1		EN 13501-1
Prodis-ID (GuT)	5CC6DDA9		www.pro-dis.info
AbZ Nr.	Z-156.601-869		

Floorsymbols



Certificates

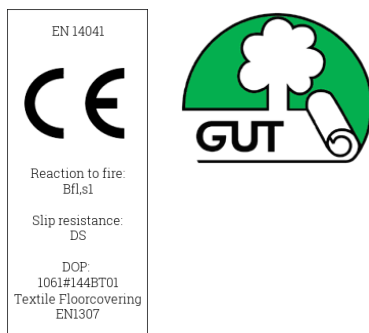

Vebe Floorcoverings b.v. certifies the supplied products to meet the requirements as specified and stated in the last editions of the technical information.

The products have been produced and tested according procedures agreed in our quality system (according ISO 9001). The tests have been carried out according to the prescribed standards.

Laying: Fully glued with adhesive that withstands chair castors. We recommend the use of floor mats in the area of castor chairs.

The producer reserves the right to alter technical specifications. Due to variations in raw materials and production circumstances, the product may vary from batch to batch.